

# Modeling and Simulation Earthquake Soil/Rock Structure Interaction

Jeremić, Yang, Wang, Salamon

University of California, Davis, CA, USA  
US Bureau of Reclamation, Denver, CO, USA

ICOLD  
Milano, Italia, September, 2019

# Outline

Introduction

Pine Flat Dam

Conclusion

# Outline

Introduction

Pine Flat Dam

Conclusion

# Motivation

Improve modeling and simulation for infrastructure objects

Use select fidelity (high ↔ low) numerical models to analyze static and dynamic behavior of soil/rock structure fluid systems

Reduction of modeling uncertainty, ability to perform desired level of sophistication modeling and simulation

Development of an expert system for modeling and simulation of Earthquake, Soil/Rock, Structure and their Interaction, Real-ESSI: <http://real-essi.info/>

# Predictive Capabilities

Prediction under Uncertainty: use of computational model to predict the state of SSI system under conditions for which the computational model has not been validated.

Verification provides evidence that the model is solved correctly. Mathematics issue.

Validation provides evidence that the correct model is solved. Physics issue.

Modeling and parametric uncertainties are always present

Goal: Predict and Inform rather than (force) Fit

# Modeling and Parametric Uncertainty

Simplified modeling: Features (important ?) are neglected (3C, 6C ground motions, inelasticity)

Modeling Uncertainty: unrealistic and unnecessary modeling simplifications



Modeling simplifications are justifiable if one or two level higher sophistication model shows that features being simplified out are not important

Material behavior and system loads are uncertain!  
"Le doute n'est pas une condition agréable, mais la certitude est absurde" Voltaire

# Modeling Uncertainty: 1C vs 6C Free Field Motions



One component of motions, 1C from 6C

Excellent fit

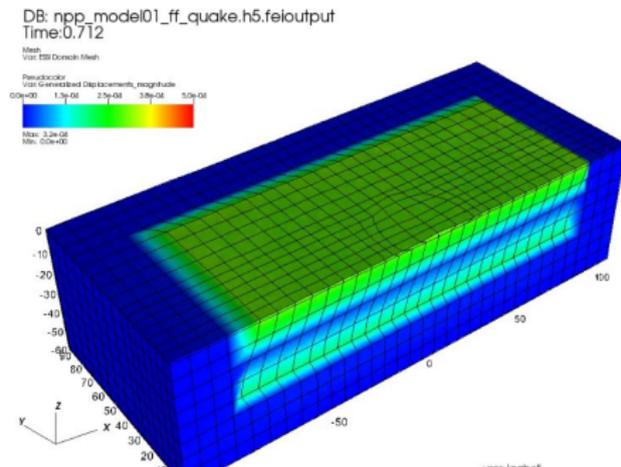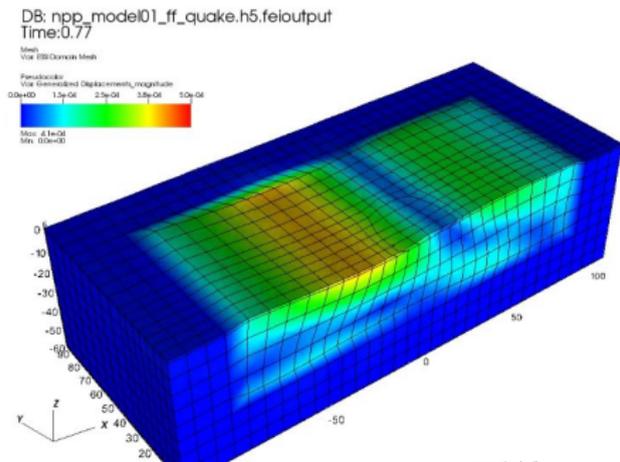

(MP4) (MP4)

# Parametric Uncertainty: Soil Stiffness

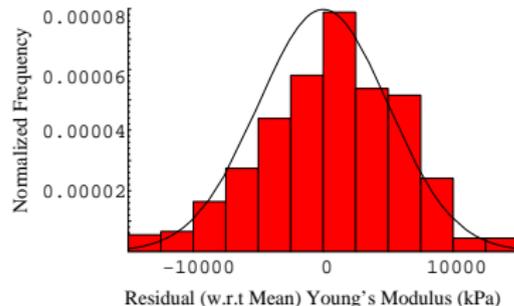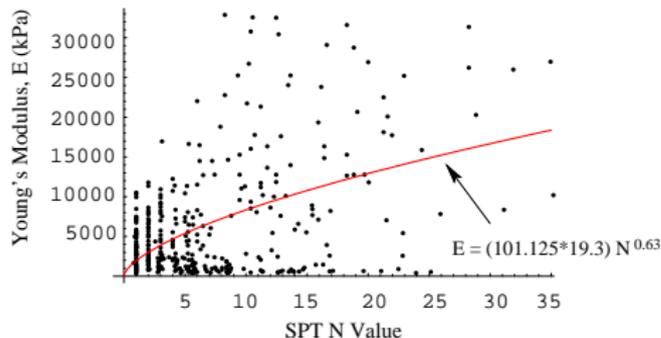

cf. Phoon and Kulhawy (1999B)

# Outline

Introduction

**Pine Flat Dam**

Conclusion


# Pine Flat Dam, Model

3D solids, with BCs for 2D analysis


Linear elastic and inelastic material and interfaces

Energy dissipation: material, viscous, numerical, radiation



Seismic input, 1C, 3C, 6C,  $3 \times 1C$ , using DRM


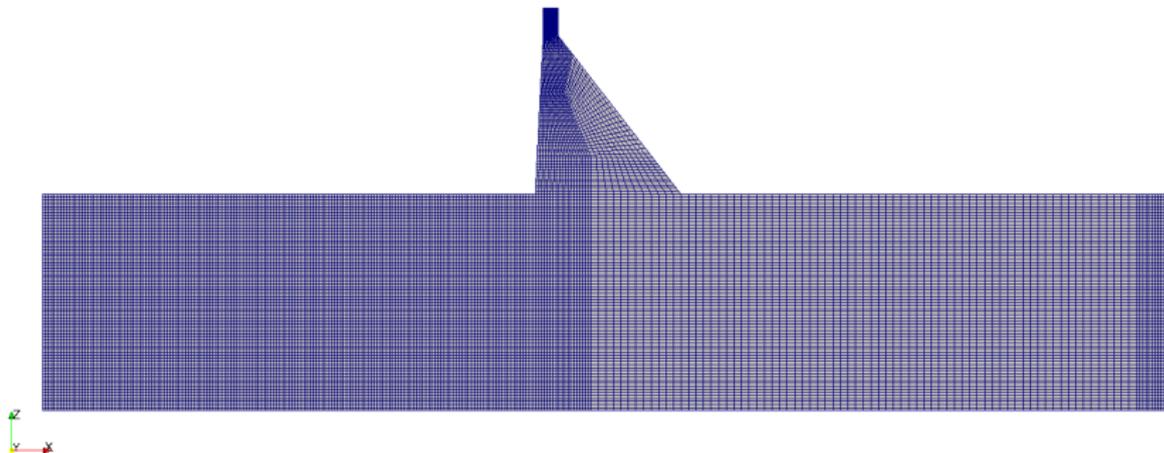


# Mesh Refinement Effects

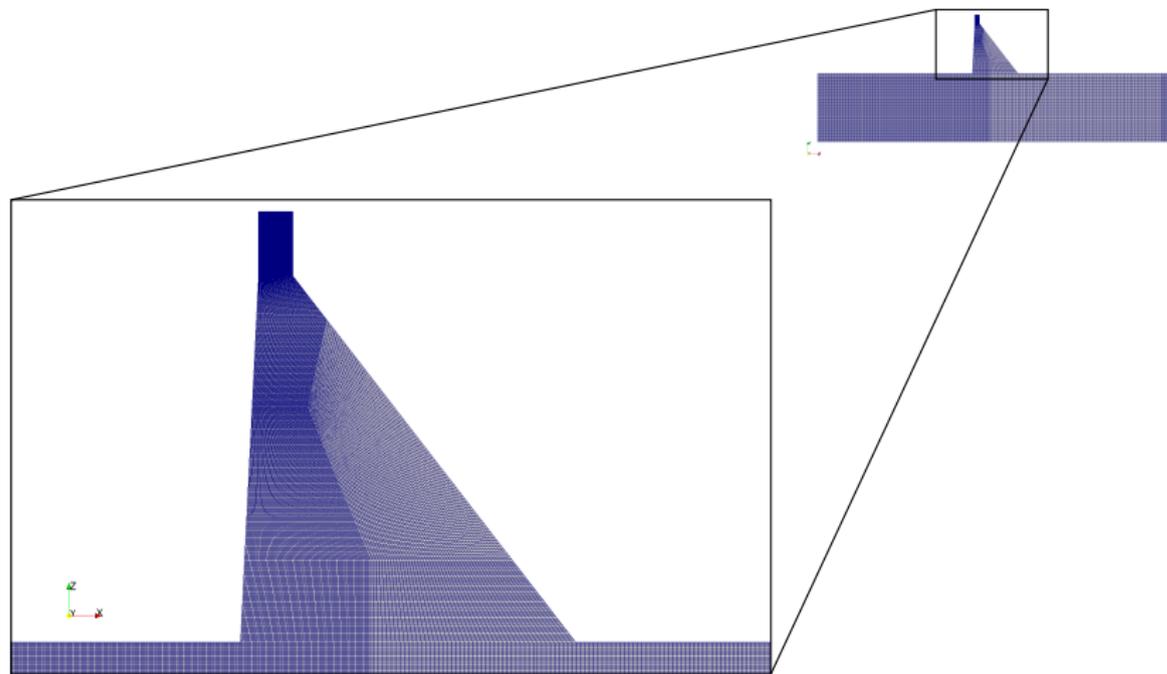


# Numerical Damping Effects, Dry, Elastic $\ddot{u}_{hor}^{top}$ , $\sigma_v^{heel}$

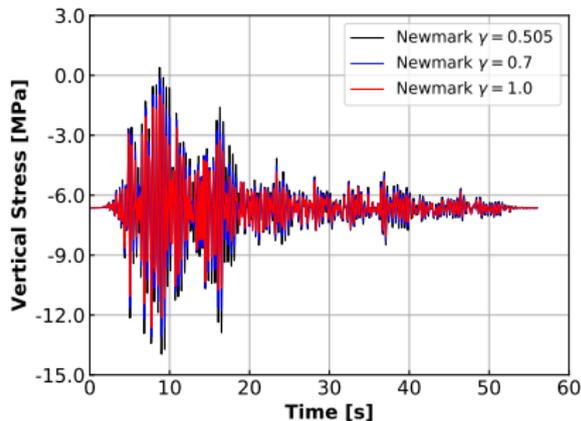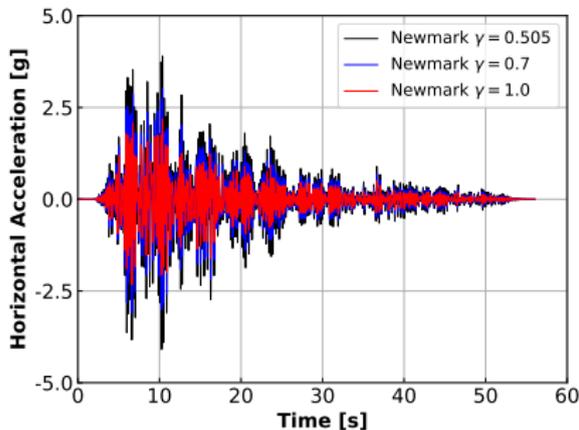


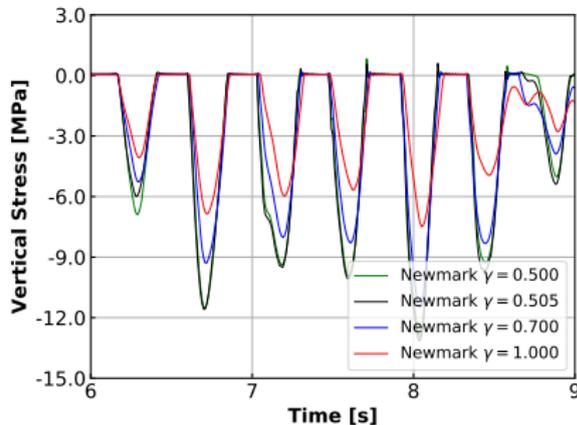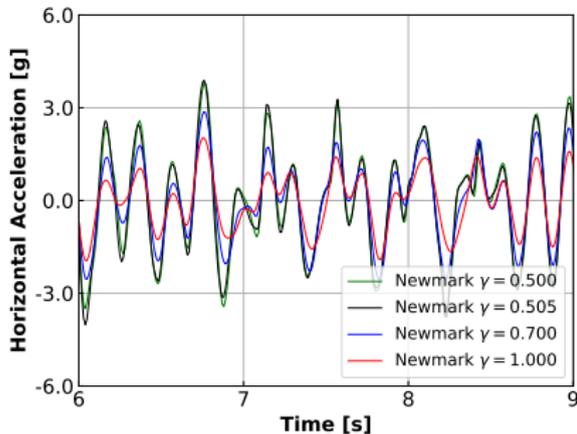Numerical Damping Effects, Wet, Inelastic  $\ddot{u}_{hor}^{top}$ ,  $\sigma_v^{heel}$ 

# Pine Flat Dam, Inelastic Interface, Hydrostatic

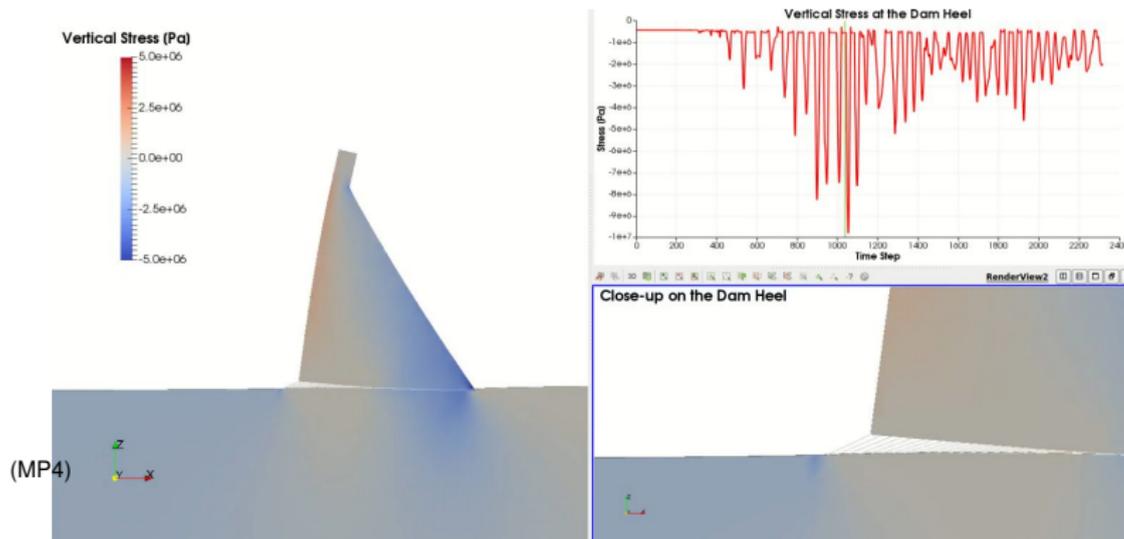

# Seismic Response, Inclined Plane Waves

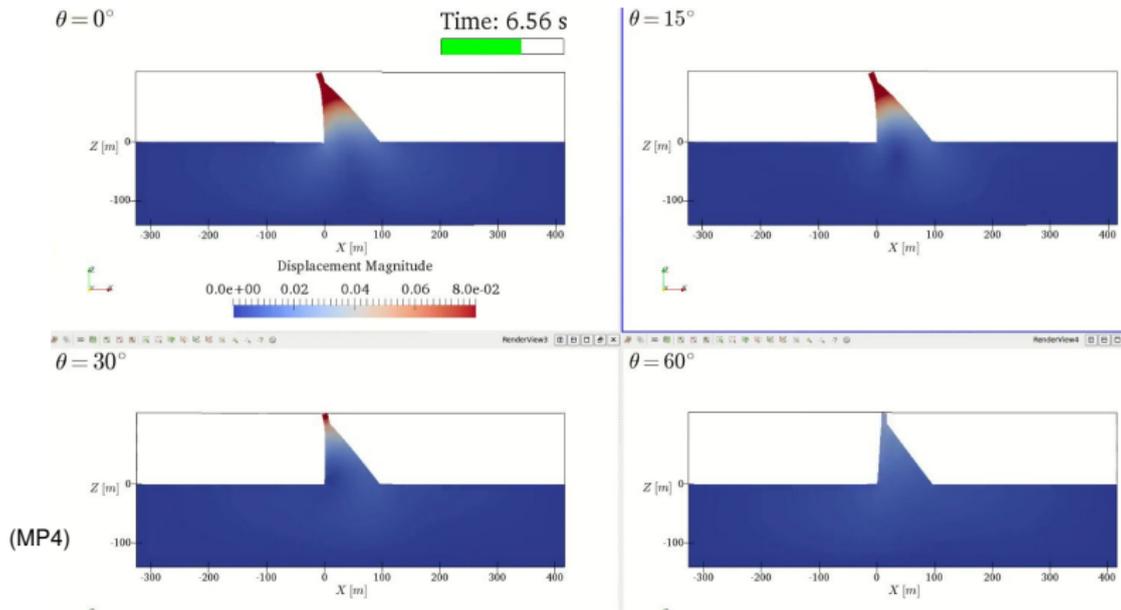

# Outline

Introduction

Pine Flat Dam

Conclusion

# Summary

Numerical modeling to predict and inform, rather than fit  
Brave effort of ICOLD, assess numerical analysis of dams!  
Education and Training is the key  
<http://real-essi.info/>

